


TRANSMITTER – EMW100T

USER INSTRUCTION

A. Features

1. These innovative wireless transmitter and corresponding wireless receivers are easy to configure and simple to operate.
2. The transmitter controls up to 4 channels (1ON, 1OFF... ..4ON, 4OFF), and each channel can command more than one receiver.
3. The “ALL OFF” and “ALL ON” buttons command all connected appliances with one single operation.
4. Blinking green LED indicates signal transmission status.

B. Diagram & Descriptions

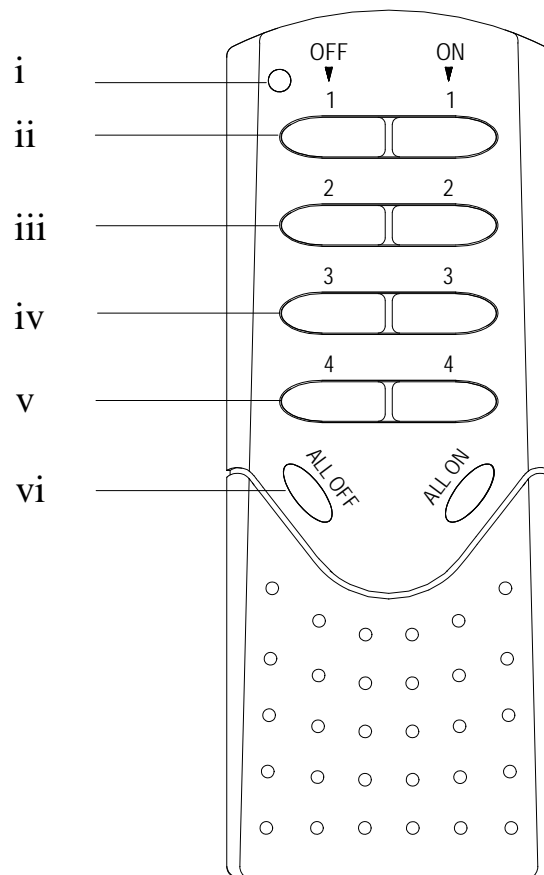

No.	Description	Function
i	LED	The green LED blinks to indicate signal transmission status.
ii	1OFF, 1ON	Switch on and off the appliances connected to channel 1 receiver EMW100R
iii	2OFF, 2ON	Switch on and off the appliances connected to channel 2 receiver EMW100R
iv	3OFF, 3ON	Switch on and off the appliances connected to channel 3 receiver EMW100R
v	4OFF, 4ON	Switch on and off the appliances connected to channel 4 receiver EMW100R
vi	ALL OFF ALL ON	Switches off all connected appliances. Switches on all connected appliances.

C. Operation

1. Configure

Press the “ON/OFF Learning Code” button on the receiver EMW100R until the red “Indicator” LED blinks. Then press any one of the four “OFF” buttons until the “Indicator” LED goes off. The receiver EMW100R is trained to respond to the corresponding channel.

Remark: Each transmitter EMW100T controls up to 4 channels. Each channel can command as many receivers EMW100R as desired.

2. Control

Press the “ON” or “OFF” button to switch on or off the appliance connected to the receiver trained to the corresponding channel.

3. Group Control

Press “ALL OFF” or “ALL ON” button to switch off or on all appliances irrespective of the individual channel

D. Specifications

1. Battery : Size 23A 3L R50 12V

2. Frequency : 433.92 MHz

3. Distance : 570 meters max.